
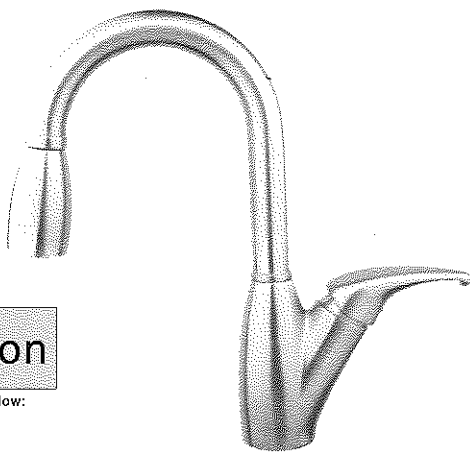


Installation Instruction

Single Handle Pull-down Kitchen Faucet

Before Your Installation

Check to make sure you have the following parts indicated below:

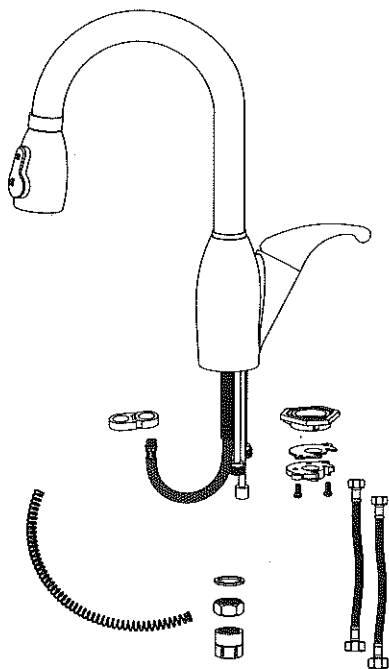

Tools You Will Need



Adjustable wrench



Adjustable wrench



Phillips screwdriver



Pipe tape
(supplied)




Spanner for body
(supplied)



Spanner for aerator
(supplied)

Replacement Parts


Keep this manual for ordering replacement parts.

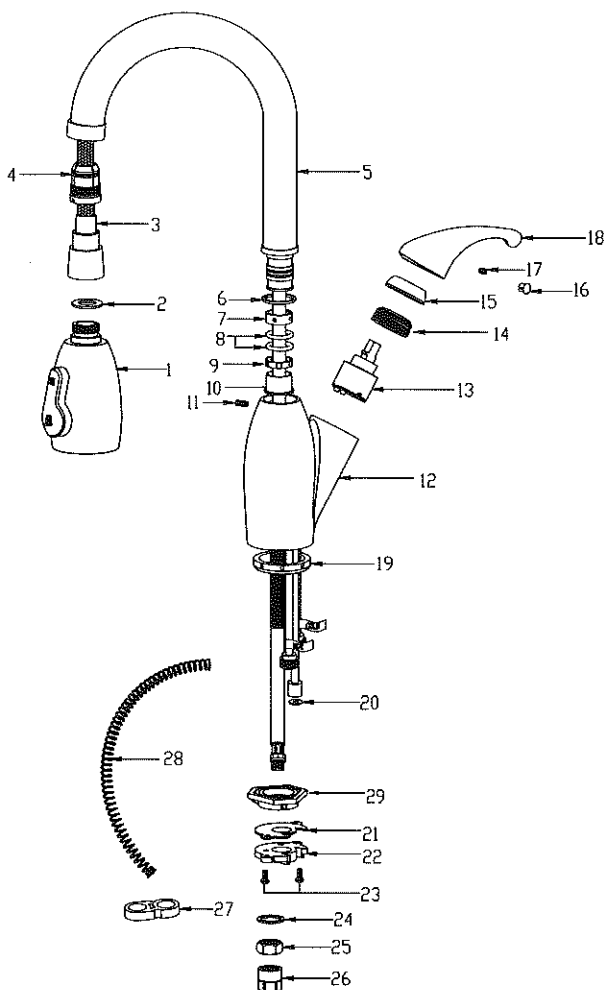


NO NAME

1. Sprayer
2. Washer
3. Hose
4. Plastic cover
5. Spout
6. White o-ring
7. Plastic cover
8. O-ring
9. Plastic cover
10. Plastic cover
11. Screw
12. Faucet body
13. Cartridge
14. Lock nut
15. Cartridge holder
16. Accessory
17. Screw
18. Handle
19. Bottom plastic
20. Flat gasket
21. Rubber gasket
22. Stainless steel gasket
23. Screw
24. Gasket
25. Hexagon nut
26. Plastic nut
27. Spring holder
28. Spring
29. Strengthening part


Product Dimension Drawing

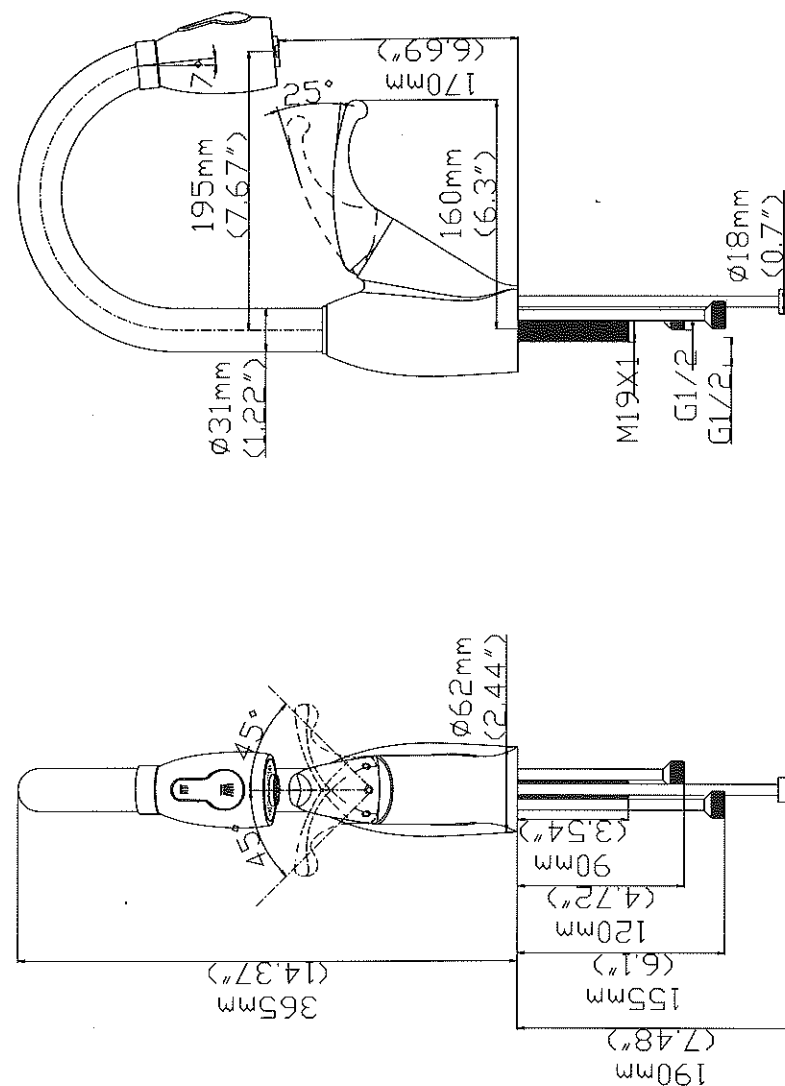


Faucet Installation Procedures

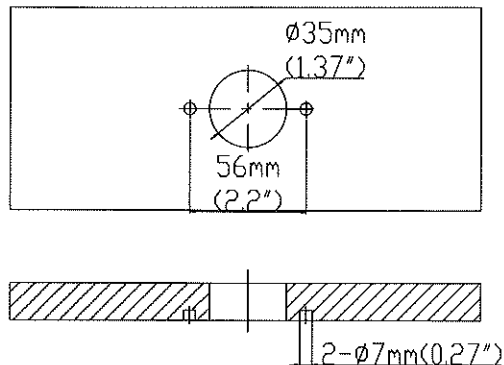


Step ①

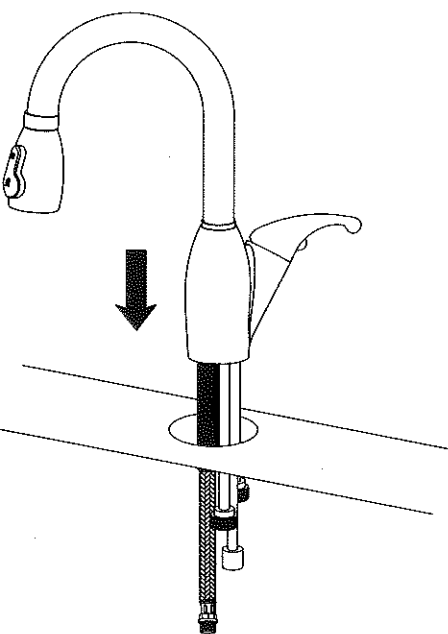


Step ②

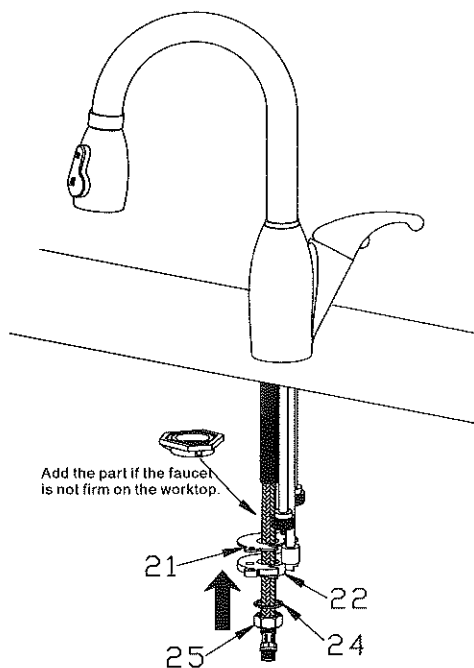


Step ③

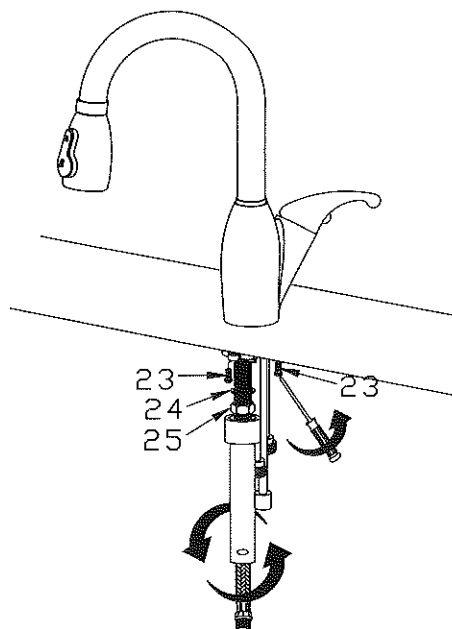


Step ④

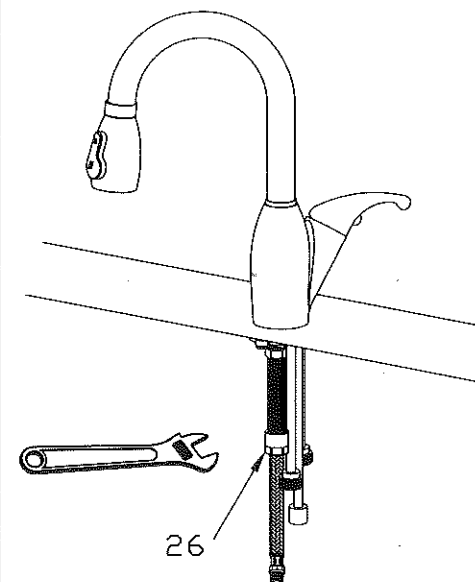


Step ⑤

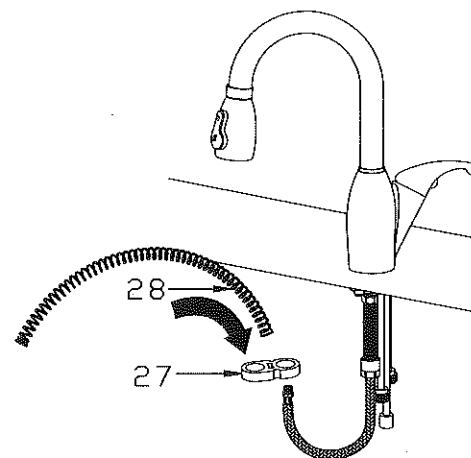


Step ⑥

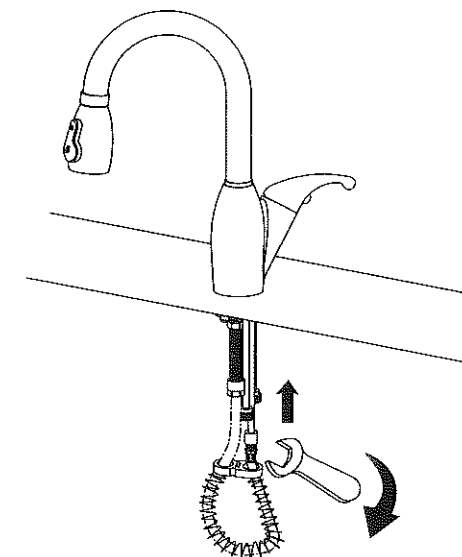


Step ⑦

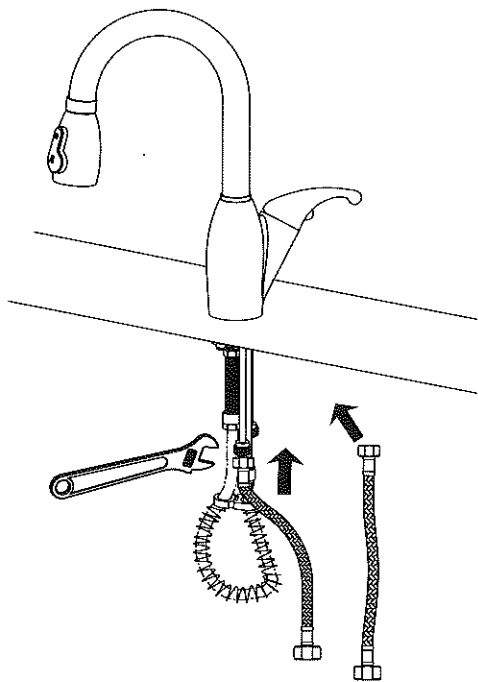


Step ⑧

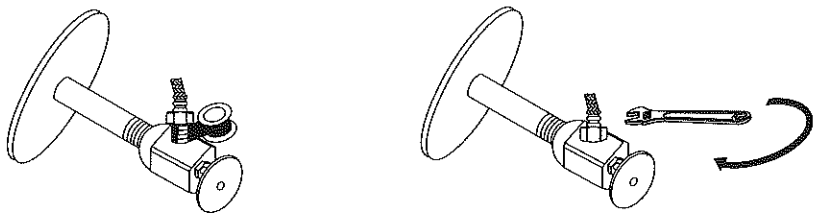

Step ⑨

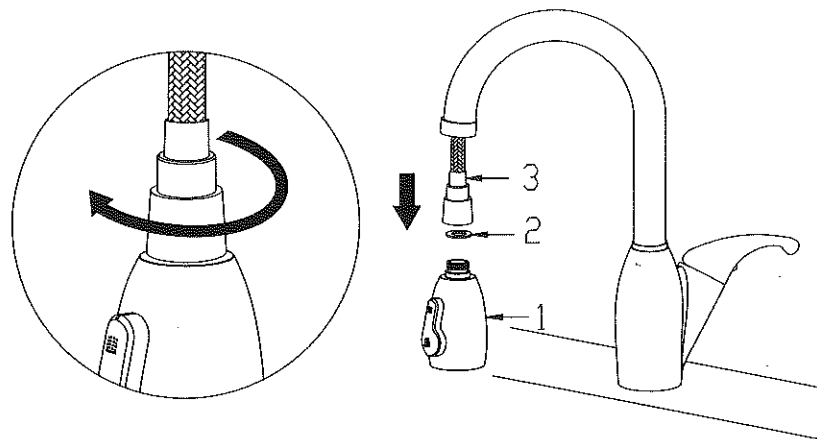


Step ⑩

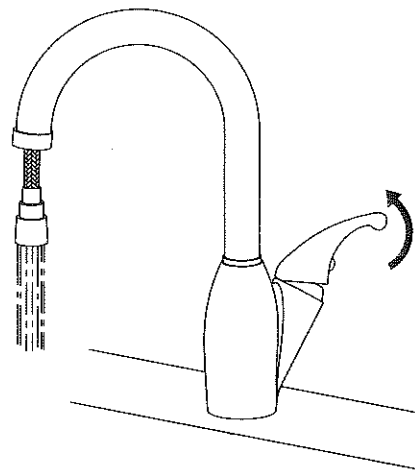

Notice:
Please removing all of the sand, silt and other things from the water hose before assembling, to avoid blocking the faucet and effecting water rate. Please use the special tools to disassemble it and wash with pneumatic equipment, if the faucet blocked.

Step ⑪

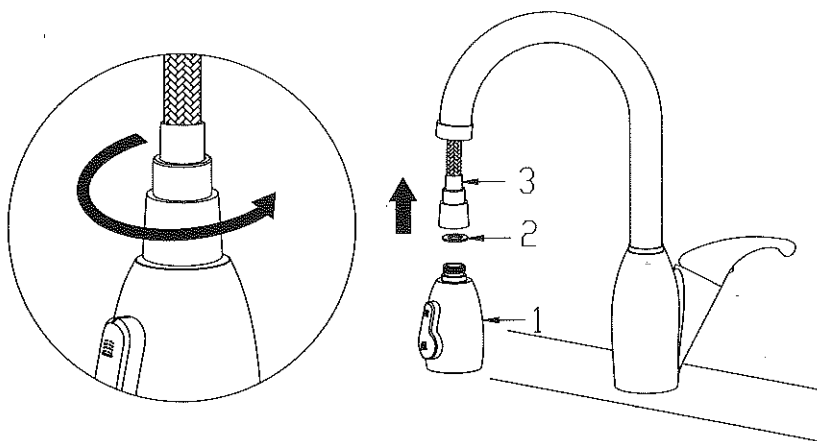

Step ⑫

